



553515

(43) International Publication Date  
25 November 2004 (25.11.2004)

PCT

(10) International Publication Number  
**WO 2004/103051 A2**

(51) International Patent Classification<sup>7</sup>: **H05K 13/00**

(21) International Application Number:  
PCT/JP2004/006682

(22) International Filing Date: 12 May 2004 (12.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-134237 13 May 2003 (13.05.2003) JP  
2003-331310 24 September 2003 (24.09.2003) JP

(71) Applicant (for all designated States except US): MAT-  
SUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka  
571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ENDO, Tadashi.  
KIDO, Kazuo. UCHIDA, Hideki. OKUDA, Osamu.  
KAKITA, Nobuyuki.

(74) Agents: KAWAMIYA, Osamu et al.; Aoyama & Partners,  
IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi,  
Osaka 540-0001 (JP).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished  
upon receipt of that report

[Continued on next page]

(54) Title: ELECTRONIC COMPONENT FEEDER AND ELECTRONIC COMPONENT FEEDING METHOD

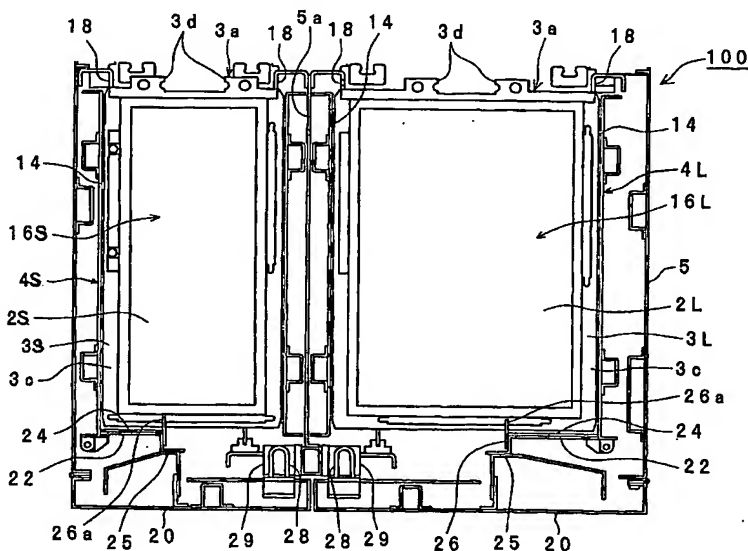

(57) Abstract: There are provided a forward-side regulating member (18) for regulating the support positions of the pallets loaded in a magazine (4) on the forward side in a pallet feed direction (A), a rearward-side regulating member (24) that is movable along the direction, for regulating the support positions of the pallets regulated by the forward-side regulating member on, the rearward side in the direction, and a horizontal posture regulating member (26) that can be arranged between the pallets, for regulating the pallet support posture so as to maintain the roughly horizontal support posture of the pallets supported by one pair of the support sections by virtue of the arrangement.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*